

# UNISORB® LEV-L-INE® MACHINERY MOUNTS

LEV-L-INE mounts, with their patented, coined, malleable aligning discs, provide true self-alignment with absolutely even load distribution over the entire bearing surface. They are designed to compensate for uneven floor distortion found in most industrial plants, and may be used with or without anchor bolts.

- Floor line may be sloped but machine line is level.
- Easily accessible, true vertical leveling adjustment.
- Patented aligning disc assures intimate contact and equal distribution of weight over entire bearing surfaces.
- Mating surfaces are machined to provide quick, easy and permanent leveling.
- Anchor bolt clearance hole permits bolting machine to floor.
- Machined base option available.


## SPECIFICATIONS

LEV-L-INE MODELS	LL-7	LL-22	LL-33
Length	5 7/8	5 5/8	6 3/4
Width	3	3 3/4	4
Leveling Bolt Size	3/8	5/8	3/4
Hex Size	3/8	1	1 1/4
Maximum Adjustment	3/16	3/16	3/16
Minimum Height	1 3/4	2 7/8	3 1/4
Clearance Hole	1 1/4	1 1/16	1 1/8
Disc Diameter	4 1/4	4 1/4	4 1/4
Load Capacity (lbs.)	7,000	22,000	33,000

All dimensions in inches.

### LEV-L-INE MODEL LL-7

Load Capacity 7,000#

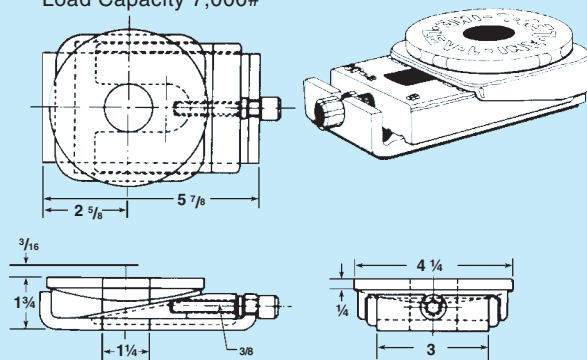


#### LL-7 MATERIAL SPECIFICATION

MOUNTING PLATE: COINED MALLEABLE IRON  
SAE SPEC. 32510  
TOP WEDGE: DUCTILE IRON  
TENSILE STRENGTH: 60,000 PSI MIN.  
BOTTOM LIFTING BLOCK: DUCTILE IRON  
TENSILE STRENGTH: 60,000 PSI MIN.  
BOLT STOCK: TO SPEC. ASE/AISI 1215, ELECTROPLATED  
BASE: DUCTILE IRON  
TENSILE STRENGTH: 60,000 PSI MIN.

### LEV-L-INE MODEL LL-22

Load Capacity 22,000#

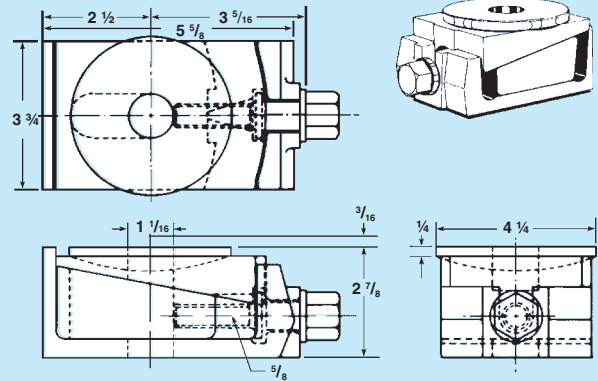


#### LL-22 MATERIAL SPECIFICATION

MOUNTING PLATE: COINED MALLEABLE IRON  
SAE SPEC. 32510  
TOP WEDGE: GRAY IRON CASTING TO ASTM CLASS 25  
TENSILE STRENGTH: 25,000 PSI MIN.  
BOTTOM LIFTING BLOCK: GRAY IRON CASTING TO ASTM CLASS 25  
TENSILE STRENGTH: 25,000 PSI MIN.  
BOLT STOCK: ASE/AISI 1215  
BASE: GRAY IRON CASTING TO ASTM CLASS 25

### LEV-L-INE MODEL LL-33

Load Capacity 33,000#

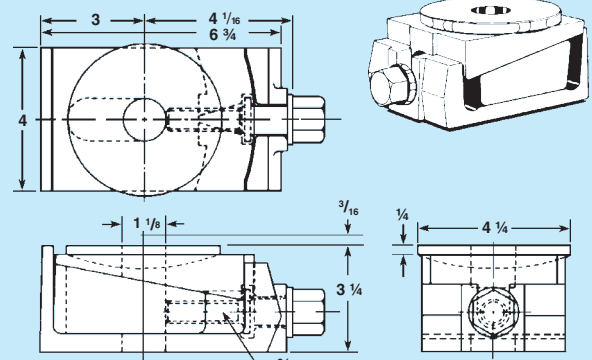

#### LL-33 MATERIAL SPECIFICATION

MOUNTING PLATE: COINED MALLEABLE IRON  
SAE SPEC. 32510  
TOP WEDGE: GRAY IRON, SAE SPEC. J431  
TENSILE STRENGTH: 30,000 PSI MIN.  
BOTTOM LIFTING BLOCK: GRAY IRON CASTING TO ASTM CLASS 30  
TENSILE STRENGTH: 30,000 PSI  
ADJUSTMENT BOLT: HARDNESS OF BOLT:  
CARBONITRATED TO 0.005 CASE  
BOLT STOCK: ASE/AISI 1215  
BASE: GRAY IRON, SAE SPEC. J431  
TENSILE STRENGTH: 30,000 PSI MIN.

